


C2TV 2 CHANNEL – INSTALLATION INSTRUCTIONS



- 1) Disconnect Rail Pressure Sensor Connector (A).
- 2) Connect the female connector of Diesel Power Harness to the Tractors Rail Sensor (A) and connect the male connector of the DP Harness to the disconnected sensor. (Please note the grey label indicating the appropriate connector.)

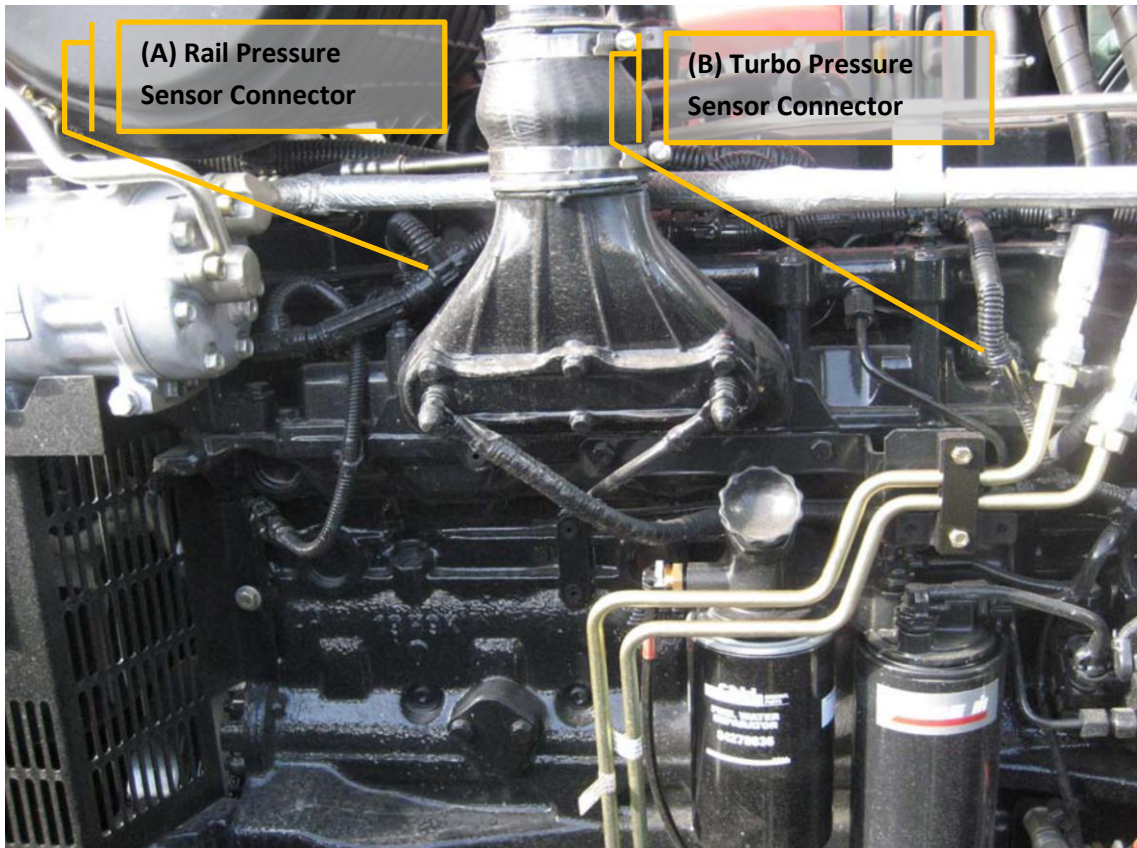

- 3) Remove the connector to the Turbo Pressure Sensor (B).
- 4) Connect the female connector of the DP Harness to the Turbo Pressure Sensor and connect the male connector of the DP Harness to the disconnected sensor.
- 5) Slide purple lock clip back on harness and plug in the DP Module. Slide purple lock clip forward to lock the DP Module in place.
- 6) Route the DP Harness and Module away from hot engine parts and secure with the zap straps supplied.
- 7) *One Bypass adapter is supplied to use in place of the DP Module should your tractor require dealer maintenance. This sets your vehicle back to manufacture settings.

For Technical Support and Installation Assistance Contact Diesel Power at 604.598.3024